



Installation Instructions

Aclare Countertop
Water Filter System



1. Unpack Contents

Package contains:

- (1) Filter Housing Assembly
- (2) Threaded Cartridge Caps A & B and O-rings (pre-installed)
- (2) Filter Cartridges A & B (pre-installed)
- (1) Faucet Diverter Hose Assembly
- (2) Brass Faucet Adapters, Rubber Washers and Installation Tool

2. Remove Existing Aerator

from your faucet and also remove the washer if it's attached to the faucet.

3. Attach the Faucet Diverter Valve

onto the faucet (**Figure 1**). If one of the supplied adapters is required, install the adapter to the faucet first with the supplied washer and then attach the diverter to the adapter. The adapters are designed so that they can be tightened using the supplied white plastic hex tool. Make sure the rubber washer is in place inside the chrome swivel collar on the diverter valve. The provided adapters fit 95% of all faucets. If the adapters do not fit, you can obtain additional sizes from your hardware or plumbing supply store. Take aerator and diverter hose for a correct match.

4. Turn the Filter Housing Over

so that the hose outlet notch is facing up. Install the inlet hose to cap A by pushing the plastic elbow firmly into the inlet hole as shown in **Figure 2**. (To determine which hose is the inlet hose, hold the hose ends so they are pointing into the sink, turn on the water supply and pull the activator button on the diverter valve. The hose end that the water comes out of is the inlet hose and should connect to the inlet fitting on cap A.) Connect the outlet hose to cap B in the same fashion. If you need to disconnect either hose after they have been inserted into the inlet/outlet connections, just depress the gray release collet while pulling out on the hose end and elbow (you can use a butter knife to help depress the gray collet).

5. Flush and activate the Filter

Turn filter unit upright and place in your preferred position, turn on the cold water supply and pull the round activator button on the diverter valve so that water is diverted to the filter. The initial flow of water will be slightly discolored and cloudy due to carbon fines and air bubbles. Allow the water to flow through the filter in this position until the water runs clear, this will usually take 10 minutes depending on your water pressure. Once the water appears clear and free of air bubbles you may drink and enjoy!

NOTE: For the first 72 hours the faucet will drip intermittently, until the filters become fully saturated. Once they are saturated, you should anticipate a residual flow of water each time you use the filter, as the system is vented and designed to self-clear the line.

IMPORTANT: This product **cannot** be used in constant pressure applications such as ice-makers or fountains.

Figure 1

Remove your aerator and attach the diverter valve in its place.

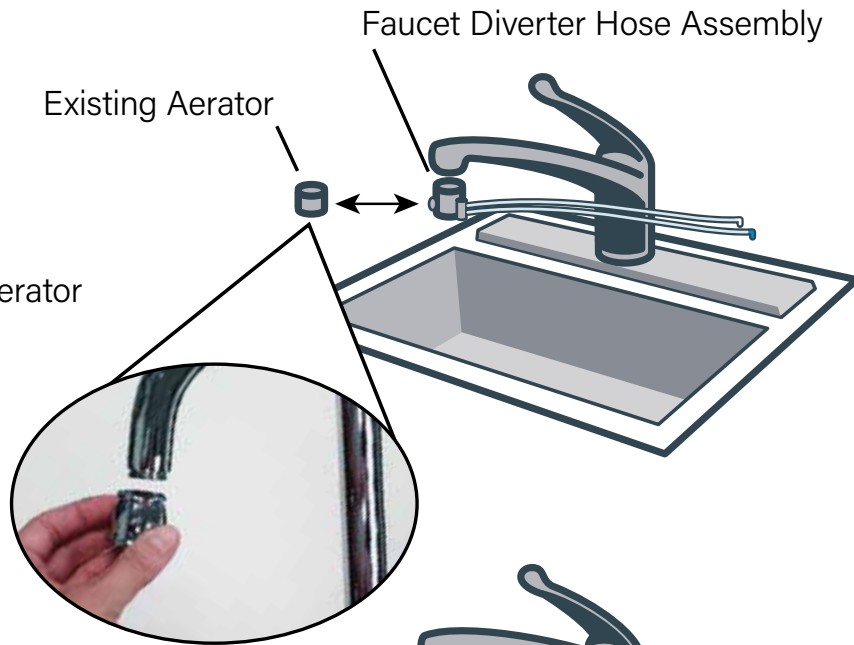


Figure 2

Push the hoses into the filter.

A–White Cap
B–Blue Cap

Turn on the diverter valve and flush the filter for 10 minutes.



Specifications:

This product is intended for use on municipally treated cold water only. **DO NOT** use on water that is microbologically unsafe or of unknown quality without adequate disinfection before or after the system.

- *This system and installation shall comply with applicable state and local regulations.*

Min Operating Pressure: 20 psi (pounds per sq in)
Max Operating Pressure: 50 psi (open discharge)
Min Operating Temperature: 40° F (4° C)

Max Operating Temperature: 90° F (32° C)
Rated Service Flow: 0.4 gallons per minute
Capacity of Filter Cartridge: 500 gallons

OWNER'S LIMITED WARRANTY

Waterwise warrants, to the original purchaser, this product against defects in materials and/or workmanship, for a period of one (1) year from the date of purchase. Defects or failures due to shipping/handling, incorrect installation, improper use or maintenance, including abuse or neglect, accidents, alterations or modifications, or unauthorized repair are specifically excluded from this warranty. No dealer, distributor, agent, representative, or other person is authorized to extend or expand this warranty.

Waterwise is not responsible or liable for personal injury, property damage, or incidental or consequential damages arising out of, or in connection with, the use or performance of the product or other damages with respect to loss of use, or costs of removal, installation, or reinstallation.

Waterwise will, at its option, replace or repair the defective part(s) without charge, provided they are returned, transportation prepaid by owner, to an authorized service facility or to the address below. Enclose a letter describing the problem, copy of dated proof of purchase, and your name, address and daytime telephone number.

This limited warranty does not guarantee uninterrupted service. Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This limited warranty is in lieu of all other warranties, expressed or implied, including, but not limited to, any implied warranty of merchantability or fitness for a particular use or purpose. This warranty gives you specific legal rights and you may also have other rights which vary from state to state or province to province.

Outside the United States, a different warranty may apply. For details, please contact your authorized Waterwise distributor.

This water filter system is designed and tested for use with genuine Aclare parts including replacement filters and all hardware (diverter valve). Use of parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure. Use of parts from other manufacturers will also void your warranty.

Visit www.healthyperceptions.com for all replacement parts.

Waterwise® Inc
3608 Parkway Blvd
Leesburg FL 34748-9399
1-888-340-0247
www.healthyperceptions.com