



Installation Instructions

Aclare Shower
Filtration System
and Optional
Wand Kit



1. Unpack all contents

- Shower Filter System
- Massaging Shower Head
- Optional Wand Kit:**
- Massaging Shower Wand
- Washers (2)
- Hose
- Cradle Assembly

2. Remove the black plastic caps from the Shower System

Make sure the white rubber washer is in place in the chrome inlet collar.

3. Remove your existing shower head from the shower supply pipe.

4. Install the System

Attach the Shower Filter System to the water supply pipe (Fig 1).

- Turn the chrome swivel collar clockwise to tighten.
- Use pliers to turn the collar an additional quarter turn or until the

filter system retains a firm position.

- Teflon tape may be required on threads in the event of leakage.

5. Filter flush & activation

- Place a container under the system to capture the first 1 to 2 gallons of water (Fig 2).
- Turn on the **COLD** water. After the water has turned clear, adjust the temperature up to a normal shower temperature. There will be a slight delay in adjustment due to the volume of the filter.
- Run until clear. Turn off and on several times. Repeat this procedure until the initial surge is free of discoloration.

6. Shower Head Installation

(Skip this step if using the optional wand kit.)

- Attach the shower head to the filter system by attaching the chrome

collar to the threaded water out opening using clockwise turns by hand (Fig 3).

Your are now ready to enjoy the benefits of showering in healthy, chlorine-free water!

6. Optional Wand Kit Installation

Wand Cradle Assembly:

Hand-tighten the assembly to the shower system (Fig 4).

Hose Attachment:

Insert one washer into the hose nut and hand-tighten onto the cradle attachment. Insert the second washer into the other hose nut and hand-tighten onto the shower wand (Fig 5).

Place Wand into Cradle Assembly:

Adjust the cradle to desired position. Hand-tighten the swivel nut.

Your are now ready to enjoy the benefits of showering in healthy, chlorine-free water!

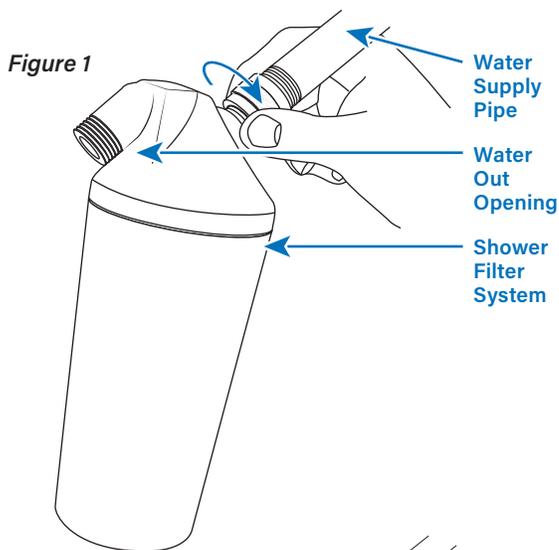


Figure 3

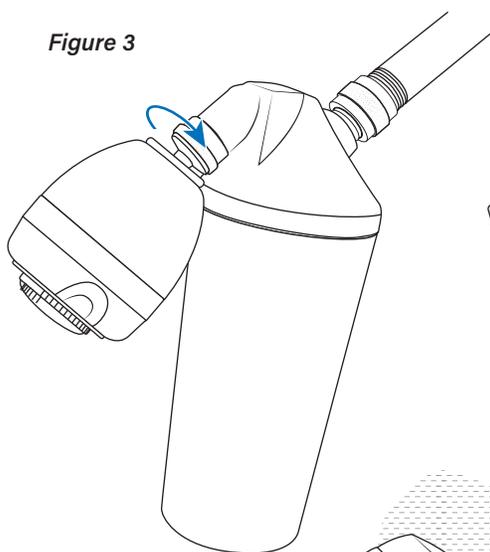


Figure 4


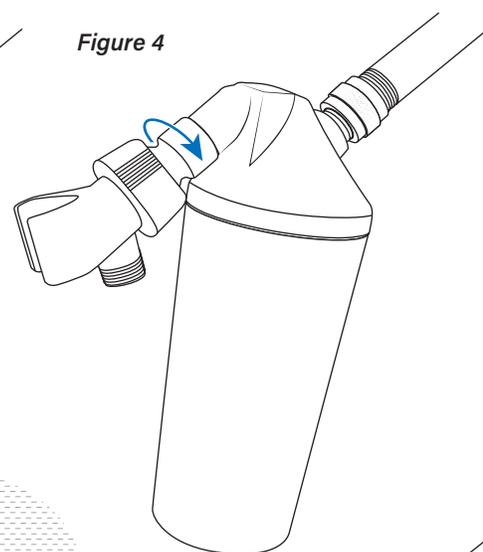


Figure 2



The initial surge of water will be discolored with carbon fines and may soil your shower stall. This carbonized water is beneficial to plants and the environment. It can be discarded in a plant bed or down the drain.

Figure 5

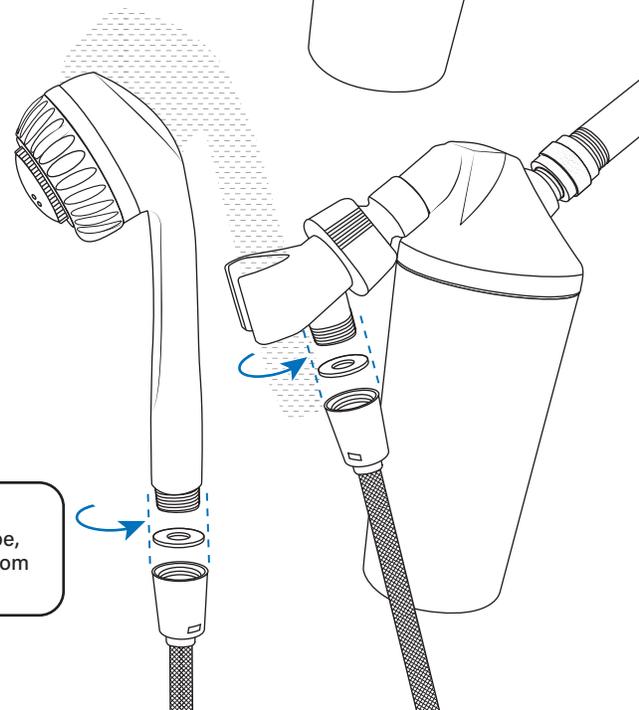

DO NOT OVERTIGHTEN THE CHROME INLET COLLAR

Overtightening may cause the washer to compress into the inside of the shower supply pipe, resulting in leakage around the connector. If this occurs, unscrew the chrome inlet collar from pipe, reinstall the washer and reconnect to the shower supply pipe.

Performance Data for the Aclare Shower Filtration System

Item #	Replacement #	Operating pressure range	Rated capacity	Max operating temp	Rated flow
2460	2461	50 psi	10,000 gallons	115° F	2.5 gpm
2463 (Wand Kit)					

This system has been tested according to NSF/ANSI 177 for reduction of free available chlorine. The concentration of free available chlorine in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 177. They have not been evaluated for free available chlorine reduction performance in the presence of chloramines. Free available chlorine reduction performance may be impacted by the presence of chloramines in the water supply. Contact your local water utility to determine if chloramines are used in treating your water.

Testing was performed under standard laboratory conditions, actual performance may vary. See preceding page for general installation conditions and needs.

In compliance with California State Law, this system has a maximum flow rate of 2.5 gallons per minute. The Aclare adjustable shower head can be adjusted to the desired pressure while still conserving water usage. The filter cartridge should be replaced every six months.



The Aclare Shower Filtration System is designed to produce the highest quality water possible with the least amount of pressure loss. Aclare's patented two-stage filter cartridge substantially reduces chlorine and other chemicals present in tap water. The filter cartridge should be replaced every six months to ensure peak performance.

- **Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system.**
- **This system and installation shall comply with applicable state and local regulations.**
- **This system is not for use as a drinking water treatment unit.**

OWNER'S LIMITED WARRANTY

Waterwise warrants, to the original purchaser, this product against defects in materials and/or workmanship, for a period of one (1) year from the date of purchase. Defects or failures due to shipping/handling, incorrect installation, improper use or maintenance, including abuse or neglect, accidents, alterations or modifications, or unauthorized repair are specifically excluded from this warranty. No dealer, distributor, agent, representative, or other person is authorized to extend or expand this warranty.

Waterwise is not responsible or liable for personal injury, property damage, or incidental or consequential damages arising out of, or in connection with, the use or performance of the product or other damages with respect to loss of use, or costs of removal, installation, or reinstallation.

Waterwise will, at its option, replace or repair the defective part(s) without charge, provided they are returned, transportation prepaid by owner, to an authorized service facility or to the address below. Enclose a letter describing the problem, copy of dated proof of purchase, and your name, address and daytime telephone number.

This limited warranty does not guarantee uninterrupted service. Repair or replacement as provided under this warranty is the exclusive remedy of the purchaser. This limited warranty is in lieu of all other warranties, expressed or implied, including, but not limited to, any implied warranty of merchantability or fitness for a particular use or purpose. This warranty gives you specific legal rights and you may also have other rights which vary from state to state or province to province.

Outside the United States, a different warranty may apply. For details, please contact your authorized Waterwise distributor.

Your shower filter is designed and tested for use with genuine Aclare parts, including replacement filters and all hardware. Use of parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure. Use of parts from other manufacturers will also void your warranty.

Visit www.healthyperceptions.com for all replacement parts.

Waterwise® Inc
3608 Parkway Blvd
Leesburg FL 34748-9399
1-888-340-0247
www.healthyperceptions.com